



MRL PASSENGER ELEVATOR CONSTRUCTION PARAMETER

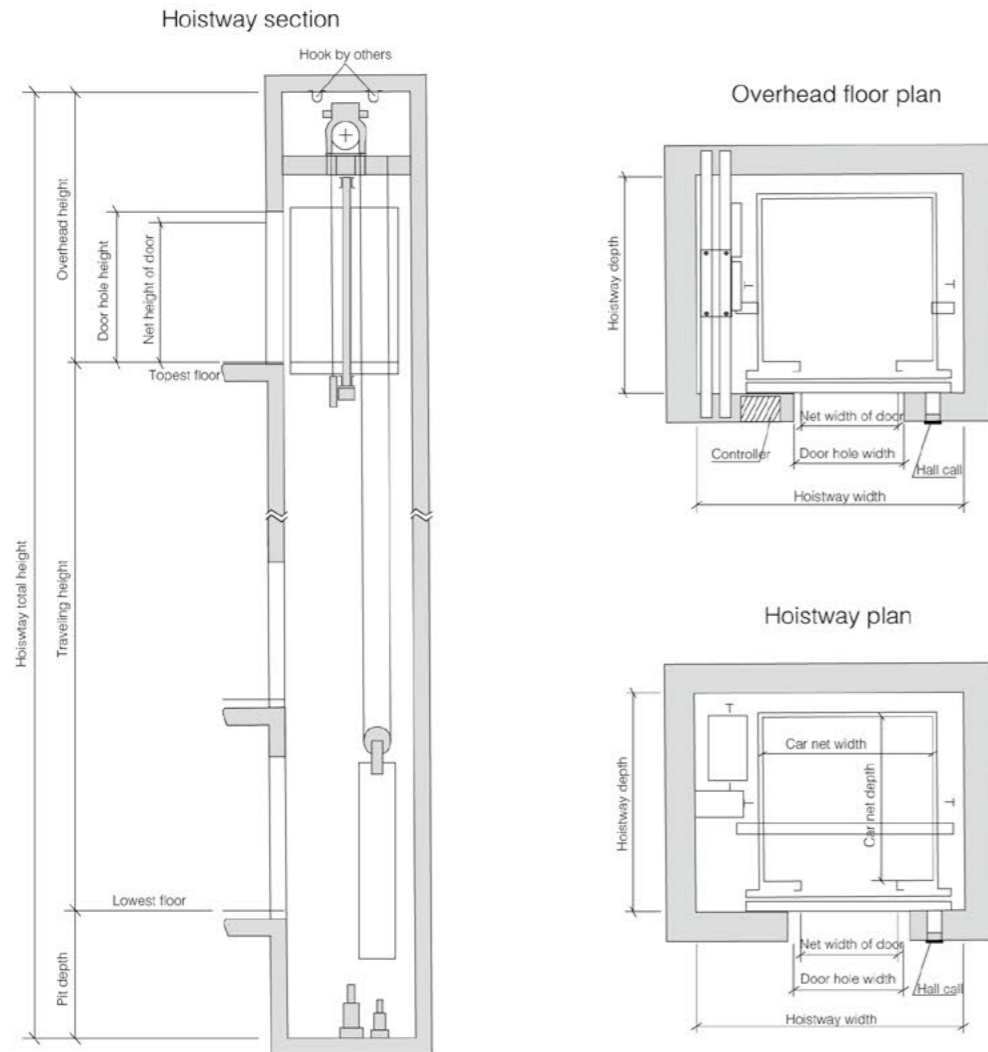

Persons	Rated capacity (kg)	Rated speed (m/s)	Car Size (mm) AA x BB	Door opening size JJ x HH Central opening	Hoistway net size			Max. TR
					AH x BH	OH	PP	
5	400	1.0	1100 x 1000	700 x 2100	2000 x 1700	4500	1700	45
		1.0				4500	1700	
8	630	1.5	1400 x 1100	800 x 2100	2300 x 1850	4600	1800	60
		1.6				4500	1700	
		1.75						
10	800	1.0	1400 x 1350	800 x 2100	2300 x 1950	4500	1700	45
		1.5				4600	1800	
		1.6						
		1.75						
		2.0						
13	1000	1.0	1600 x 1500	900 x 2100	2500 x 2100	4500	1700	45
		1.5				4600	1800	
		1.6						
		1.75						
		2.0						
21	1600	1.0	1900 x 1800	1100 x 2100	2850 x 2400	4500	1500	45
		1.5/1.75				4700	1600	
		2.0				4900	1800	
		2.5				5100	2000	

STRETCHER ELEVATOR CONSTRUCTION PARAMETER

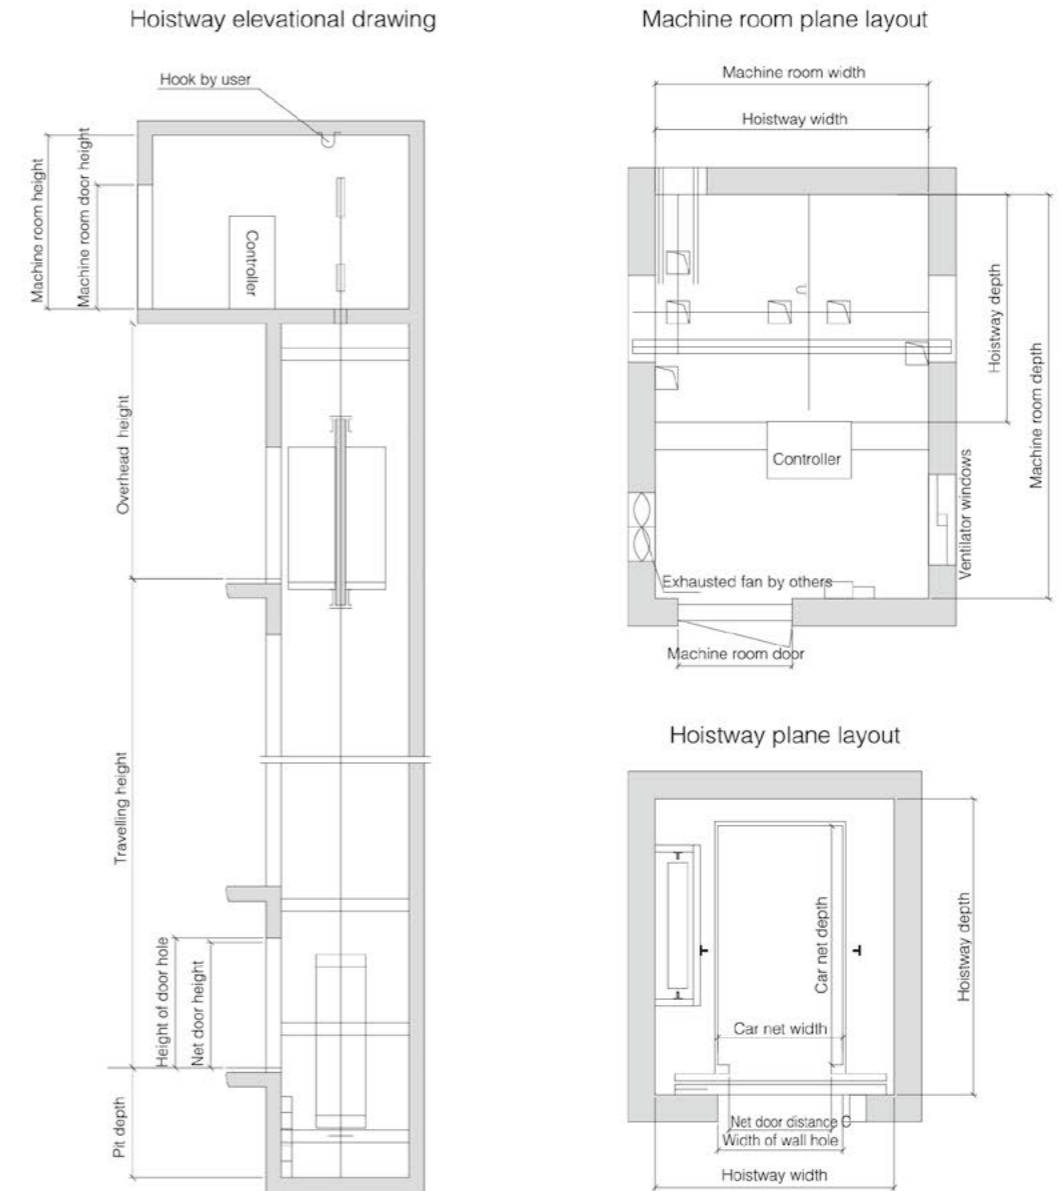

Load(kg)	Speed (m/s)	Car Size	Door opening size	Hoistway size(mm)	Machine room size(mm)	Overhead height (OH)	Pit depth (PP)
		Inner size AXB	Net door-opening	Width x depth	Width x depth		
1000	1.0	1100X2100	900	2100X2600	2100X4000	4500	1500
	1.5					4600	1600
	1.75					4700	1700
	2.0			2200X2600	2200X4000	4900	2000
	2.5					5500	2500
	3.0					5800	3200
4.0	2400X2600	3500X4100	6000	3400			